

スチールグレーチングますぶた 180°開閉


JPR5SM



JPX5SX



■平面図

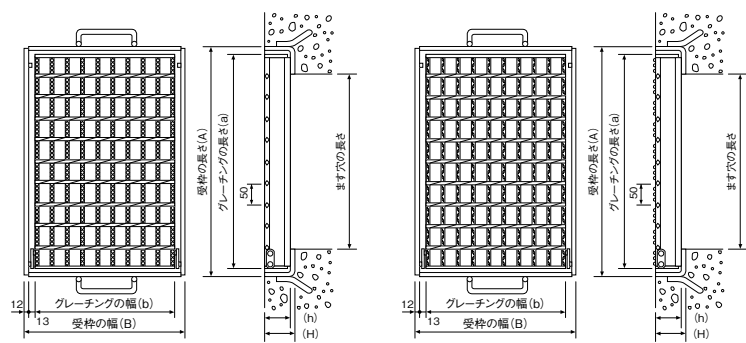

CHECK

◎ご注文は下記要領でご指示ください。

JP R 5 SM 55 - 34
 JP X 5 SX
 ます穴寸法=300×400mm
 H=55mm
 SM・SX型(ますぶた180°開閉)
 クロスバーピッチ=50mm
 R:ローレット X:デコデコ
 日本ピット製

ます穴の幅、長さ
 ます穴の寸法に関係なくグレーチングのツイストバー方向が幅、ペアリ
 ングバー方向が長さとなりますので、ご注意ください。



180°開閉 / ローレット50

荷重	ます穴寸法 幅×長 (mm)	ローレットグレーチング		受 枠 寸法(mm) B×A×H	総重量 (kg)
		型式記号	寸法(mm) b×a×h		
T-25	300×400	JPR5SM55-34	289×488×55	339×520×61	20.4
	400×400	JPR5SM55-44	395×488×55	445×520×61	25.3
	500×400	JPR5SM55-54	501×488×55	551×520×61	30.1
	300×500	JPR5SM65-35	289×588×65	339×620×71	27.2
	400×500	JPR5SM65-45	395×588×65	445×620×71	33.6
	500×500	JPR5SM65-55	501×588×65	551×620×71	40.0
	300×600	JPR5SM75-36	289×688×75	339×720×81	35.2
	400×600	JPR5SM75-46	395×688×75	445×720×81	43.4
	500×600	JPR5SM75-56	501×688×75	551×720×81	51.7
	600×600	JPR5SM75-66	607×688×75	657×720×81	60.2
T-20	500×700	JPR5SM75-57	501×788×75	551×820×81	57.8
	700×700	JPR5SM75-77	678×788×75	728×820×81	73.4
	300×400	JPR5SM50-34	289×488×50	339×520×56	18.9
	400×400	JPR5SM50-44	395×488×50	445×520×56	23.5
	500×400	JPR5SM50-54	501×488×50	551×520×56	28.0
	300×500	JPR5SM55-35	289×588×55	339×620×61	23.6
	400×500	JPR5SM55-45	395×588×55	445×620×61	29.1
	500×500	JPR5SM55-55	501×588×55	551×620×61	34.8
	300×600	JPR5SM65-36	289×688×65	339×720×71	30.8
	400×600	JPR5SM65-46	395×688×65	445×720×71	38.2
T-14 T-6	500×600	JPR5SM65-56	501×688×65	551×720×71	45.4
	600×600	JPR5SM65-66	607×688×65	657×720×71	53.0
	500×700	JPR5SM75-57	501×788×75	551×820×81	57.8
	700×700	JPR5SM75-77	678×788×75	728×820×81	73.4
	300×400	JPR5SM44-34	275×488×44	325×520×50	15.2
	400×400	JPR5SM44-44	395×488×44	445×520×50	19.4
	500×400	JPR5SM44-54	485×488×44	535×520×50	22.5
	300×500	JPR5SM50-35	289×588×50	339×620×56	21.8
	400×500	JPR5SM50-45	395×588×50	445×620×56	27.0
	500×500	JPR5SM50-55	501×588×50	551×620×56	32.2
T-14 T-6	300×600	JPR5SM55-36	289×688×55	339×720×61	26.7
	400×600	JPR5SM55-46	395×688×55	445×720×61	33.1
	500×600	JPR5SM55-56	501×688×55	551×720×61	39.3
	600×600	JPR5SM55-66	607×688×55	657×720×61	45.9
	500×700	JPR5SM60-57	501×788×60	551×820×66	47.9
	700×700	JPR5SM60-77	678×788×60	728×820×66	60.9



180°開閉 / デコデコ50

荷重	ます穴寸法 幅×長 (mm)	デコデコグレーチング		受 枠 寸法(mm) B×A×H	総重量 (kg)
		型式記号	寸法(mm) b×a×h		
T-25	300×400	JPX5SX55-34	289×488×55	339×520×61	20.6
	400×400	JPX5SX55-44	395×488×55	445×520×61	25.6
	500×400	JPX5SX55-54	501×488×55	551×520×61	30.5
	300×500	JPX5SX65-35	289×588×65	339×620×71	27.4
	400×500	JPX5SX65-45	395×588×65	445×620×71	34.0
	500×500	JPX5SX65-55	501×588×65	551×620×71	40.5
	300×600	JPX5SX75-36	289×688×75	339×720×81	35.4
	400×600	JPX5SX75-46	395×688×75	445×720×81	43.7
	500×600	JPX5SX75-56	501×688×75	551×720×81	52.1
	600×600	JPX5SX75-66	607×688×75	657×720×81	60.7
T-20	500×700	JPX5SX75-57	501×788×75	551×820×81	58.3
	700×700	JPX5SX75-77	678×788×75	728×820×81	74.1
	300×400	JPX5SX50-34	289×488×50	339×520×56	19.2
	400×400	JPX5SX50-44	395×488×50	445×520×56	23.8
	500×400	JPX5SX50-54	501×488×50	551×520×56	28.4
	300×500	JPX5SX55-35	289×588×55	339×620×61	23.8
	400×500	JPX5SX55-45	395×588×55	445×620×61	29.5
	500×500	JPX5SX55-55	501×588×55	551×620×61	35.2
	300×600	JPX5SX65-36	289×688×65	339×720×71	31.2
	400×600	JPX5SX65-46	395×688×65	445×720×71	38.6
T-14 T-6	500×600	JPX5SX65-56	501×688×65	551×720×71	45.9
	600×600	JPX5SX65-66	607×688×65	657×720×71	53.6
	500×700	JPX5SX75-57	501×788×75	551×820×81	58.3
	700×700	JPX5SX75-77	678×788×75	728×820×81	74.1
	300×400	JPX5SX44-34	275×488×44	325×520×50	15.4
	400×400	JPX5SX44-44	395×488×44	445×520×50	19.6
	500×400	JPX5SX44-54	485×488×44	535×520×50	22.7
	300×500	JPX5SX50-35	289×588×50	339×620×56	22.1
	400×500	JPX5SX50-45	395×588×50	445×620×56	27.4
	500×500	JPX5SX50-55	501×588×50	551×620×56	32.6
T-14 T-6	300×600	JPX5SX55-36	289×688×55	339×720×61	27.0
	400×600	JPX5SX55-46	395×688×55	445×720×61	33.5
	500×600	JPX5SX55-56	501×688×55	551×720×61	39.9
	600×600	JPX5SX55-66	607×688×55	657×720×61	46.5
	500×700	JPX5SX60-57	501×788×60	551×820×66	44.5
	700×700	JPX5SX60-77	678×788×60	728×820×66	61.7