


# スチールグレーチング ボルト式 一般・エコノミー

JPX5XC.R



■平面図

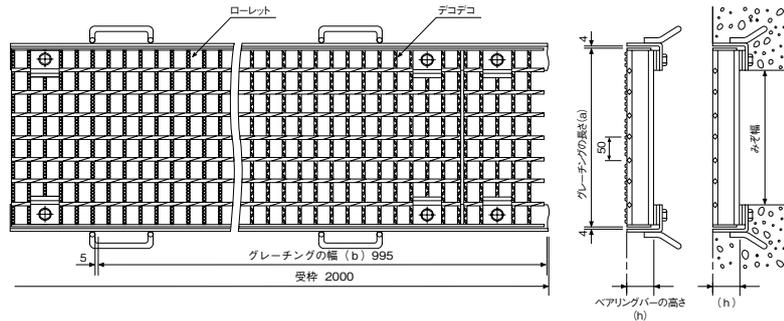

CHECK

◎ご注文は下記要領でご指示ください。

- JP R 5 MC 50 R 20
  - 溝幅=200mm
  - 静音低減用ゴム
  - H=50mm
  - MC型(ボルト式)
  - クロスバーピッチ=50mm
  - R:ローレット X:デコデコ
  - 日本ピット製
- JP WC 50 R
  - H=50mm用
  - ボルト固定式受枠
  - 日本ピット製



一般用 / デコデコ50

(みぞぶたボルト式)



エコノミー / デコデコ50


(みぞぶたボルト式)

荷重	みぞ幅 (mm)	グレーチング			受枠			総重量 (kg)
		型式記号	寸法 (mm) b×a×h	重量 (kg)	型式記号	寸法 (mm) b×a×h	重量 (kg)	
T-25	200	JPX5XC50R20	995×300×50	25.1	JPWC50R	L66×60×6	12.4	37.5
	250	JPX5XC55R25	995×350×55	30.5	JPWC55R	L71×60×6	12.6	43.1
	300	JPX5XC60R30	995×400×60	37.1	JPWC60R	L76×60×6	13.0	50.1
	350	JPX5XC65R35	995×450×65	43.0	JPWC65R	L81×60×6	13.8	56.8
	400	JPX5XC75R40	995×500×75	53.1	JPWC75R	L91×60×6	14.4	67.5
T-20	450	JPX5XC75R45	995×550×75	57.7	JPWC75R	L91×60×6	14.4	72.1
	200	JPX5XC44R20	995×300×44	20.2	JPWC44R	L61×60×6	11.9	32.1
	250	JPX5XC50R25	995×350×50	28.4	JPWC50R	L66×60×6	12.4	40.8
	300	JPX5XC55R30	995×400×55	34.1	JPWC55R	L71×60×6	12.6	46.7
	350	JPX5XC60R35	995×450×60	40.9	JPWC60R	L76×60×6	13.0	53.9
T-14	400	JPX5XC65R40	995×500×65	47.1	JPWC65R	L81×60×6	13.8	60.9
	450	JPX5XC75R45	995×550×75	57.7	JPWC75R	L91×60×6	14.4	72.1
	500	JPX5XC75R50	995×600×75	62.4	JPWC75R	L91×60×6	14.4	76.8
	200	JPX5XC38R20	995×300×38	18.1	JPWC38R	L56×60×6	11.6	29.7
	250	JPX5XC44R25	995×350×44	22.7	JPWC44R	L61×60×6	11.9	34.6
T-14	300	JPX5XC50R30	995×400×50	31.6	JPWC50R	L66×60×6	12.4	44.0
	350	JPX5XC50R35	995×450×50	34.9	JPWC50R	L66×60×6	12.4	47.3
	400	JPX5XC55R40	995×500×55	41.1	JPWC55R	L71×60×6	12.6	53.7
	450	JPX5XC55R45	995×550×55	44.6	JPWC55R	L71×60×6	12.6	57.2
	500	JPX5XC65R50	995×600×65	55.2	JPWC65R	L81×60×6	13.8	69.0
	550	JPX5XC75R55	995×650×75	67.1	JPWC75R	L91×60×6	14.4	81.5


●ゴムなしタイプもあります。

荷重	みぞ幅 (mm)	グレーチング			受枠			総重量 (kg)
		型式記号	寸法 (mm) b×a×h	重量 (kg)	型式記号	寸法 (mm) b×a×h	重量 (kg)	
T-25	200	JPX5XC44R20	995×300×44	20.2	JPWC 44R	L61×60×6	11.9	32.1
	250	JPX5XC50R25	995×350×50	28.4	JPWC 50R	L66×60×6	12.4	40.8
	300	JPX5XC55R30	995×400×55	34.1	JPWC 55R	L71×60×6	12.6	46.7
	350	JPX5XC60R35	995×450×60	40.9	JPWC 60R	L76×60×6	13.0	53.9
	400	JPX5XC65R40	995×500×65	47.1	JPWC 65R	L81×60×6	13.8	60.9
T-20	450	JPX5XC75R45	995×550×75	57.7	JPWC 75R	L91×60×6	14.4	72.1
	500	JPX5XC75R50	995×600×75	62.4	JPWC 75R	L91×60×6	14.4	76.8
	200	JPX5XC38R20	995×300×38	18.1	JPWC 38R	L56×60×6	11.6	29.7
	250	JPX5XC44R25	995×350×44	22.7	JPWC 44R	L61×60×6	11.9	34.6
	300	JPX5XC50R30	995×400×50	31.6	JPWC 50R	L66×60×6	12.4	44.0
T-14	350	JPX5XC55R35	995×450×55	37.6	JPWC 55R	L71×60×6	12.6	50.2
	400	JPX5XC60R40	995×500×60	44.8	JPWC 60R	L76×60×6	13.0	57.8
	450	JPX5XC65R45	995×550×65	51.1	JPWC 65R	L81×60×6	13.8	64.9
	500	JPX5XC65R50	995×600×65	55.2	JPWC 65R	L81×60×6	13.8	69.0
	550	JPX5XC75R55	995×650×75	67.1	JPWC 75R	L91×60×6	14.4	81.5
	600	JPX5XC75R60	995×700×75	71.8	JPWC 75R	L91×60×6	14.4	86.2
T-14	200	JPX5XC32R20	995×300×32	15.9	JPWC 32R	L50×60×6	10.9	26.8
	250	JPX5XC38R25	995×350×38	20.3	JPWC 38R	L56×60×6	11.6	31.9
	300	JPX5XC44R30	995×400×44	25.2	JPWC 44R	L61×60×6	11.9	37.1
	350	JPX5XC50R35	995×450×50	34.9	JPWC 50R	L66×60×6	12.4	47.3
	400	JPX5XC50R40	995×500×50	38.1	JPWC 50R	L66×60×6	12.4	50.5
	450	JPX5XC55R45	995×550×55	44.6	JPWC 55R	L71×60×6	12.6	57.2

## ボルト固定式

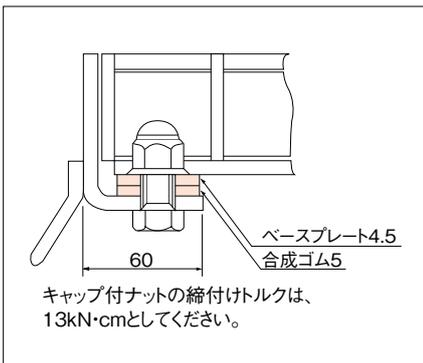

## ボルトキャップ

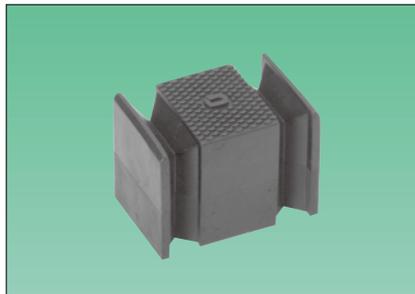

型式記号	寸法 (mm)	対応グレーチング ヘアリングバー高さ (mm)
JPBCR-32	44×70×28	32
JPBCR-38	44×70×34	38
JPBCR-44	44×70×40	44
JPBCR-50	44×70×46	50
JPBCR-55	44×70×51	55
JPBCR-60	44×70×56	60