


景観用(側溝用) JP-PA



ステンレス製


スリット有り

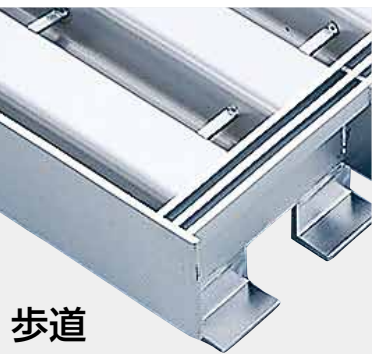


■ 平面図

T-14・T-2用

部品構成 材質：SUS304
①底波板 ②スリットバー ③受枠 ④アンカー ⑤ゴムクッション(NR)


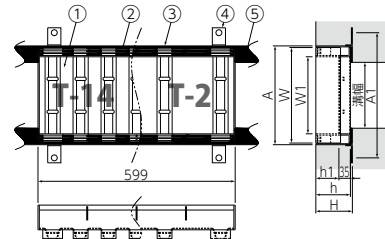


■ 断面図



歩道用

部品構成 材質：SUS304
①底波板 ②スリットバー ③受枠 ④アンカー ⑤ゴムクッション(NR)

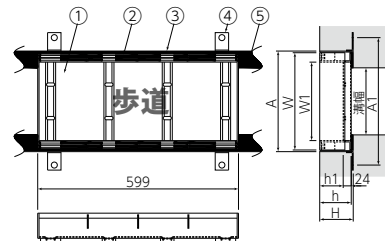

■ 寸法表 ※(P)=ピッチ (S)=スキマ

PA-14[T-14] / PA-2[T-2]

充填深さ 70/40mm

3t受枠仕様

溝 幅 (mm)	型 式	本体寸法					P=10 / S=6		P=15 / S=11		受 枠				
							適応荷重								
							T-14	T-2	T-14	T-2					
		h ₁	W	W ₁	L	h	質量(kg/枚)	質量(kg/枚)	質量(kg/枚)	質量(kg/枚)	アングルサイズ	A	A ₁	H	質量(kg/両側m)
100	710	70	190	134	599	105	8.0	7.3	7.5	6.8	L111×50×3t	200	280	111	8.1
	410	40				75	6.5	5.8	6.0	5.3	L 81×50×3t			81	6.7
150	715	70	240	184		105	9.0	8.2	8.5	7.7	L111×50×3t	250	330	111	8.1
	415	40				75	7.5	6.6	6.9	6.1	L 81×50×3t			81	6.7
200	720	70	290	234		105	10.0	9.1	9.4	8.5	L111×50×3t	300	380	111	8.1
	420	40				75	8.3	7.4	7.7	6.8	L 81×50×3t			81	6.7
250	725	70	340	284		105	10.9	9.9	10.4	9.4	L111×50×3t	350	430	111	8.1
	425	40				75	9.2	8.1	8.6	7.6	L 81×50×3t			81	6.7
300	730	70	390	334		105	11.9	10.8	11.4	10.3	L111×50×3t	400	480	111	8.1
	430	40				75	10.1	8.9	9.5	8.4	L 81×50×3t			81	6.7
350	735	70	440	384		105	15.3	11.7	14.8	11.1	L111×50×3t	450	530	111	8.1
	435	40				75	13.4	9.7	12.8	9.1	L 81×50×3t			81	6.7
400	740	70	490	434		105	19.3	12.5	18.8	11.9	L111×50×3t	500	580	111	8.1
	440	40				75	17.2	10.4	16.7	9.9	L 81×50×3t			81	6.7

PA-歩【歩道用】

充填深さ 70/30mm

溝 幅 (mm)	型 式	本体寸法					P=10 / S=6		P=15 / S=11		受 枠				
							適応荷重								
		h ₁	W	W ₁	L	h	質量 (kg/枚)	質量 (kg/枚)	アングルサイズ	A	A ₁	H	質量 (kg/両側m)		
100	710	70	190	134	599	94	7.0	6.4	L100×50×3t	200	280	100	7.6		
	310	30				54	4.8	4.3	L 60×50×3t			60	5.7		
150	715	70	240	184		94	7.8	7.2	L100×50×3t	250	330	100	7.6		
	315	30				54	5.5	5.0	L 60×50×3t			60	5.7		
200	720	70	290	234		94	8.6	8.0	L100×50×3t	300	380	100	7.6		
	320	30				54	6.2	5.6	L 60×50×3t			60	5.7		
250	725	70	340	284		94	9.4	8.8	L100×50×3t	350	430	100	7.6		
	325	30				54	6.8	6.3	L 60×50×3t			60	5.7		
300	730	70	390	334		94	10.2	9.6	L100×50×3t	400	480	100	7.6		
	330	30				54	7.5	6.9	L 60×50×3t			60	5.7		
350	735	70	440	384		94	11.0	10.4	L100×50×3t	450	530	100	7.6		
	335	30				54	8.1	7.6	L 60×50×3t			60	5.7		
400	740	70	490	434		94	11.8	11.2	L100×50×3t	500	580	100	7.6		
	340	30				54	8.8	8.2	L 60×50×3t			60	5.7		

備考欄

■ご注文は下記要領でご指示ください。

[JP PA 2 715]

① ② ③ ④

① 日本ピット製品 ② スリット有り(側溝用)

③ 適応荷重：T-2 ④ 充填深さ：70mm/溝幅：150mm

景観用(集水桝用) JP-PAO



ステンレス製


スリット有り




■ 平面図

T-14・T-2用

部品構成 材質：SUS304
①底波板 ②スリットバー ③受枠 ④アンカー ⑤ゴムクッション(NR)





■ 断面図



歩道用

部品構成 材質：SUS304
①底波板 ②スリットバー ③受枠 ④アンカー ⑤ゴムクッション(NR)



■ 寸法表 ※(P)=ピッチ (S)=スキマ

PAO-14[T-14] / PAO-2[T-2]

充填深さ 70/40mm

3t四L受枠仕様

樹穴 (mm)	型 式	本体寸法					P=10 / S=6		P=15 / S=11		四L受枠					
							適応荷重									
							T-14	T-2	T-14	T-2						
		h ₁	W	W ₁	L	h	質量(kg/枚)	質量(kg/枚)	質量(kg/枚)	質量(kg/枚)	アングルサイズ	A	A ₁	B	H	質量(kg/台)
300×300	730	70	390	334	390	105	8.9	7.8	8.6	7.4	L111×50×3t	400	480	400	111	6.2
	430	40				75	7.5	6.3	7.1	6.0	L 81×50×3t				81	5.1
350×350	735	70	440	384	440	105	10.8	9.1	10.4	8.7	L111×50×3t	450	530	450	111	7.0
	435	40				75	9.1	7.4	8.7	7.0	L 81×50×3t				81	5.7
400×400	740	70	490	434	490	105	12.3	10.9	11.9	10.5	L111×50×3t	500	580	500	111	7.8
	440	40				75	10.5	9.1	10.0	8.6	L 81×50×3t				81	6.3
450×450	745	70	540	484	540	105	14.4	12.4	13.9	11.9	L111×50×3t	550	630	550	111	8.5
	445	40				75	12.4	10.4	11.9	9.9	L 81×50×3t				81	7.0
500×500	750	70	590	534	590	105	20.1	17.0	19.5	16.4	L111×50×3t	600	680	600	111	9.3
	450	40				75	17.8	14.7	17.3	14.2	L 81×50×3t				81	7.6
550×550	755	70	640	584	640	105	22.5	19.8	21.9	19.3	L111×50×3t	650	730	650	111	10.1
	455	40				75	20.1	17.4	19.5	16.8	L 81×50×3t				81	8.2
600×600	760	70	690	634	690	105	25.8	22.2	25.1	21.6	L111×50×3t	700	780	700	111	10.9
	460	40				75	23.2	19.6	22.5	18.9	L 81×50×3t				81	8.9

PAO-歩【歩道用】

充填深さ 70/30mm

樹穴 (mm)	型 式	本体寸法					P=10 / S=6		P=15 / S=11		四L受枠					
							適応荷重									
							歩 道									
		h ₁	W	W ₁	L	h	質量(kg/枚)	質量(kg/枚)	アングルサイズ	A	A ₁	B	H	質量(kg/台)		
300×300	730	70	390	334	390	94	7.4	7.0	L100×50×3t	400	480	400	100	5.8		
	330	30				54	5.3	4.9	L 60×50×3t				60	4.3		
350×350	735	70	440	384	440	94	8.6	8.2	L100×50×3t	450	530	450	100	6.5		
	335	30				54	6.2	5.8	L 60×50×3t				60	4.8		
400×400	740	70	490	434	490	94	10.3	9.8	L100×50×3t	500	580	500	100	7.2		
	340	30				54	7.6	7.2	L 60×50×3t				60	5.3		
450×450	745	70	540	484	540	94	11.7	11.2	L100×50×3t	550	630	550	100	8.0		
	345	30				54	8.8	8.3	L 60×50×3t				60	5.9		
500×500	750	70	590	534	590	94	13.2	12.6	L100×50×3t	600	680	600	100	8.7		
	350	30				54	10.0	9.4	L 60×50×3t				60	6.4		
550×550	755	70	640	584	640	94	15.2	14.6	L100×50×3t	650	730	650	100	9.4		
	355	30				54	11.7	11.1	L 60×50×3t				60	6.9		
600×600	760	70	690	634	690	94	16.9	16.2	L100×50×3t	700	780	700	100	10.1		
	360	30				54	13.1	12.5	L 60×50×3t				60	7.5		