

景観用(側溝用) JP-PB




ステンレス製

スリット無し


■ 平面図

T-14・T-2用

部品構成 材質：SUS304
①底波板 ②受枠 ③アンカー ④ゴムクッション(NR)


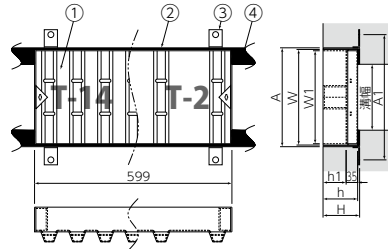


■ 断面図



歩道用

部品構成 材質：SUS304
①底波板 ②受枠 ③アンカー ④ゴムクッション(NR)

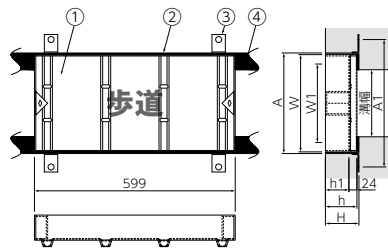

■ 寸法表 ※(P)=ピッチ (S)=スキマ

PB-14[T-14] / PB-2[T-2]

充填深さ 70/40mm

3t受枠仕様

溝 幅 (mm)	型 式	本体寸法					適応荷重		受 枠				
		h _i	W	W _i	L	h	T-14	T-2	アングルサイズ	A	A _i	H	質量(kg/両側m)
							質量(kg/枚)	質量(kg/枚)					
100	710	70	190	182	599	105	7.4	6.8	L111×50×3t	200	280	111	8.1
	410	40				75	5.7	5.1	L 81×50×3t			81	6.7
150	715	70	240	232		105	8.4	7.6	L111×50×3t	250	330	111	8.1
	415	40				75	6.6	5.9	L 81×50×3t			81	6.7
200	720	70	290	282		105	9.3	8.5	L111×50×3t	300	380	111	8.1
	420	40				75	7.4	6.6	L 81×50×3t			81	6.7
250	725	70	340	332		105	10.3	9.3	L111×50×3t	350	430	111	8.1
	425	40				75	8.3	7.4	L 81×50×3t			81	6.7
300	730	70	390	382		105	11.2	10.2	L111×50×3t	400	480	111	8.1
	430	40				75	9.2	8.1	L 81×50×3t			81	6.7
350	735	70	440	432		105	14.9	11.0	L111×50×3t	450	530	111	8.1
	435	40				75	12.8	8.9	L 81×50×3t			81	6.7
400	740	70	490	482		105	19.2	11.9	L111×50×3t	500	580	111	8.1
	440	40				75	17.0	9.6	L 81×50×3t			81	6.7

PB-歩【歩道用】

充填深さ 70/30mm

溝 幅 (mm)	型 式	本体寸法					適応荷重		受 枠				
		h _i	W	W _i	L	h	歩 道		アングルサイズ	A	A _i	H	質量(kg/両側m)
							質 量 (kg/枚)						
100	710	70	190	182	599	94	6.4	L100×50×3t	200	280	100	7.6	
	310	30				54	4.1	L 60×50×3t			60	5.7	
150	715	70	240	232		94	7.2	L100×50×3t	250	330	100	7.6	
	315	30				54	4.7	L 60×50×3t			60	5.7	
200	720	70	290	282		94	8.0	L100×50×3t	300	380	100	7.6	
	320	30				54	5.4	L 60×50×3t			60	5.7	
250	725	70	340	332		94	8.8	L100×50×3t	350	430	100	7.6	
	325	30				54	6.0	L 60×50×3t			60	5.7	
300	730	70	390	382		94	9.6	L100×50×3t	400	480	100	7.6	
	330	30				54	6.7	L 60×50×3t			60	5.7	
350	735	70	440	432		94	10.4	L100×50×3t	450	530	100	7.6	
	335	30				54	7.3	L 60×50×3t			60	5.7	
400	740	70	490	482		94	11.2	L100×50×3t	500	580	100	7.6	
	340	30				54	8.0	L 60×50×3t			60	5.7	

景観用(集水桝用) JP-PBO





ステンレス製

スリット無し

■ 平面図



T-14・T-2用

部品構成 材質：SUS304
①底波板 ②受枠 ③アンカー ④ゴムクッション(NR)



歩道用

部品構成 材質：SUS304
①底波板 ②受枠 ③アンカー ④ゴムクッション(NR)



■ 寸法表 ※(P)=ピッチ (S)=スキマ

PBO-14[T-14] / PBO-2[T-2]

充填深さ 70/40mm

3t四L受枠仕様

ます穴 (mm)	型 式	本体寸法					適応荷重		四L受枠					
		h ₁	W	W ₁	L	h	T-14	T-2	アングルサイズ	A	A ₁	B	H	質量(kg/台)
							質量(kg/枚)	質量(kg/枚)						
300×300	730	70	390	382	390	105	8.9	7.8	L111×50×3t	400	480	400	111	6.2
	430	40				75	7.2	6.1	L 81×50×3t				81	5.1
350×350	735	70	440	432	440	105	10.7	9.0	L111×50×3t	450	530	450	111	7.0
	435	40				75	8.7	7.1	L 81×50×3t				81	5.7
400×400	740	70	490	482	490	105	12.1	10.8	L111×50×3t	500	580	500	111	7.8
	440	40				75	10.0	8.7	L 81×50×3t				81	6.3
450×450	745	70	540	532	540	105	14.1	12.2	L111×50×3t	550	630	550	111	8.5
	445	40				75	11.8	9.9	L 81×50×3t				81	7.0
500×500	750	70	590	582	590	105	19.9	16.9	L111×50×3t	600	680	600	111	9.3
	450	40				75	17.5	14.4	L 81×50×3t				81	7.6
550×550	755	70	640	632	640	105	22.3	19.7	L111×50×3t	650	730	650	111	10.1
	455	40				75	19.6	17.0	L 81×50×3t				81	8.2
600×600	760	70	690	682	690	105	25.5	22.0	L111×50×3t	700	780	700	111	10.9
	460	40				75	22.7	19.2	L 81×50×3t				81	8.9

PBO-歩【歩道用】

充填深さ 70/30mm

ます穴 (mm)	型 式	本体寸法					適応荷重		四L受枠					
		h ₁	W	W ₁	L	h	歩 道		アングルサイズ	A	A ₁	B	H	質量(kg/台)
							質量(kg/枚)							
300×300	730	70	390	382	390	94	7.4	L100×50×3t	400	480	400	100	5.8	
	330	30				54	4.9	L 60×50×3t				60	4.3	
350×350	735	70	440	432	440	94	8.5	L100×50×3t	450	530	450	100	6.5	
	335	30				54	5.8	L 60×50×3t				60	4.8	
400×400	740	70	490	482	490	94	10.1	L100×50×3t	500	580	500	100	7.2	
	340	30				54	7.1	L 60×50×3t				60	5.3	
450×450	745	70	540	532	540	94	11.4	L100×50×3t	550	630	550	100	8.0	
	345	30				54	8.2	L 60×50×3t				60	5.9	
500×500	750	70	590	582	590	94	12.9	L100×50×3t	600	680	600	100	8.7	
	350	30				54	9.4	L 60×50×3t				60	6.4	
550×550	755	70	640	632	640	94	14.7	L100×50×3t	650	730	650	100	9.4	
	355	30				54	10.9	L 60×50×3t				60	6.9	
600×600	760	70	690	682	690	94	16.3	L100×50×3t	700	780	700	100	10.1	
	360	30				54	12.3	L 60×50×3t				60	7.5	